

## BAG


系列防爆隔离密封盒(d II)



### 适用范围 Application

- 适用于1区、2区危险场所。
- 适用于II A、II B、II C类爆炸性气体环境。
- Can be used in hazardous areas: Zone 1 and Zone 2.
- Can be used in explosive gas atmospheres of Category IIA、IIB and IIC.

### 型号含义 Model implication

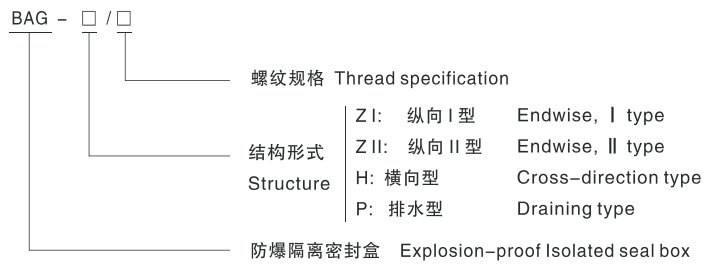

### 产品特点 Features

- 外壳采用ZL102铝合金铸造成型，表面高压静电喷塑；
- 采用管螺纹联接；
- 具有良好的密封性能。
- The housing is die cast in aluminum alloy, with high voltage static plastic-sprayed surface.
- Adopt the connection of pipe thread.
- Well sealing.

### 主要技术参数 Main technical parameters

- 执行标准：GB 3836.1、GB 3836.2、IEC60079
- 防爆标志：Exd II
- 防腐等级：WF1
- 管螺纹规格：G 1/2"~G 2"
- Implementing the standard : GB 3836.1、GB 3836.2、IEC60079

## BAG

Type explosion-proof isolated seal box (d II)

- Ex-mark: Exd II
- Explosion-proof class: WF1
- Pipe thread specification: G 1/2"~G 2"

型号 Type 螺纹规格 Thread specification	BAG-Z I-□		BAG-Z II-□		BAG-P-□		BAG-H-□		电缆外径(φ, mm) Cable's outside diameter
	A	B	A	B	A	B	A	B	
1/2"	100	75	100	60	130	82	100	95	6~10
3/4"	100	80	115	60	130	86	105	100	9~14
1"	110	90	125	70	150	108	110	110	11~18
1 1/4"	115	100	145	90	160	116	125	135	14~25
1 1/2"	119	110	150	100	185	134	130	140	17~28
2"	138	120	170	120	195	150	180	160	25~38

### 外形及安装举例 Outline and mounting example

